

Unit Bid Price \$70,000.00 Total Bid Price \$70,000.00

In accordance with the provisions of Title 38:2251 et seq., preference is hereby given to materials, supplies or equipment which are manufactured, processed, produced or assembled in Louisiana, quality being equal to other materials, supplies or equipment offered by companies outside of the State of Louisiana.

Do you claim this preference? YES ☐ NO ☒

Specify location within Louisiana where this product is manufactured, processed, produced or assembled.

NA

Have you attached the qualifying letter according to the requirements of the INSTRUCTIONS TO BIDDERS? YES ☐ NO ☒

Specify each item that you are claiming a preference on NA

Bidders are hereby advised that the accompanying document entitled "INSTRUCTIONS TO BIDDERS" is an integral part of this request for bids. Bidders should be aware of all provisions in this document.

"Official Bid Documents are available at Central Bidding. Electronic Bids are accepted at Central Bidding. Central Bidding can be accessed at www.centralbidding.com. For questions related to the electronic bidding process, please call Central Bidding at 225-810-4814."

Legal Company

Name: Rooted Land Management, LLC Date: 8/21/24

Individual: Brady Willcutt

Signature: 

Title: Owner

Phone Number: 256-684-1645

Mailing Address: 820 Hwy 2, Sterlington, LA 71280

State of
Louisiana
Secretary of
State



COMMERCIAL DIVISION
225.925.4704

Fax Numbers

225.932.5317 (Admin. Services)
225.932.5314 (Corporations)
225.932.5318 (UCC)

Name	Type	City	Status
ROOTED LAND MANAGEMENT, LLC	Limited Liability Company	BASTROP	Active

Previous Names

Business: ROOTED LAND MANAGEMENT, LLC
Charter Number: 45322164K
Registration Date: 3/23/2023
Domicile Address

6117 TIMBER LANE
BASTROP, LA 71220

Mailing Address

6117 TIMBER LANE
BASTROP, LA 71220

Status

Status: Active
Annual Report Status: In Good Standing
File Date: 3/23/2023
Last Report Filed: 4/25/2024
Type: Limited Liability Company

Registered Agent(s)

Agent: BRADY WILLCUTT
Address 1: 6117 TIMBER LANE
City, State, Zip: BASTROP, LA 71220
Appointment Date: 3/23/2023

Officer(s)

Additional Officers: No

Officer: BRADY WILLCUTT
Title: Manager, Member
Address 1: 6117 TIMBER LANE
City, State, Zip: BASTROP, LA 71220

Officer: JOHNNY MICHAEL PHILLIPS, JR.
Title: Manager, Member
Address 1: 106 EAST SHORE ROAD
City, State, Zip: MONROE, LA 71203

Amendments on File (1)


Description	Date
Appointing, Change, or Resign of Officer	6/13/2024

Print

AtkoreTM

Razor Ribbon

Barbed Tape Division
250 Capital Drive
Hebron, Ohio 43025 USA
(740) 928-1018
(877) 285-4066 Toll Free

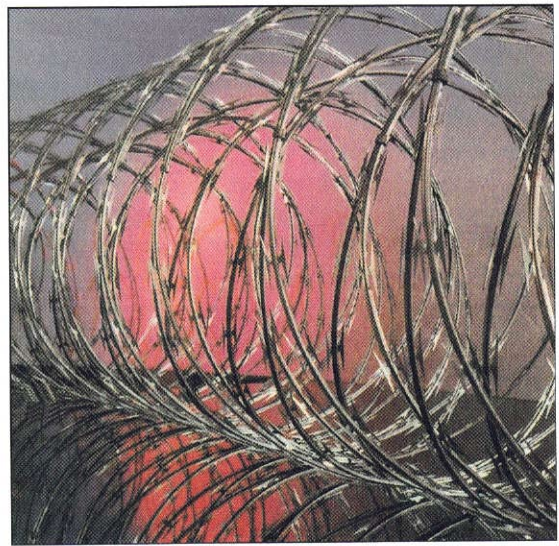

BARBED TAPE SPECIFICATION

24"/30" MAZE[®] Double Coil REINFORCED CONCERTINA

1. GENERAL

- 1.01. This section covers the furnishing and installation of barbed tape. Together with chain link fence, the completed installation comprises a security barrier.
- 1.02. Applicable Documents:
 - ASTM A-176 Specification for Stainless and Heat-Resisting Chromium Steel Plate, Sheet, and Strip.
 - ASTM A-764 Specification for Steel Wire, Carbon, Drawn, Galvanized and Galvanized at Size for Mechanical Springs.

2. PRODUCTS

- 2.01. Acceptable manufacturer is Atkore Razor Ribbon, (740) 928-1018, "Maze[®] Double Coil".
- 2.02. Barbed tape shall be 24"/30" ± 1 " diameter concertina style coil within coil consisting of 31/31 loops, each loop shall contain 19/24 ± 1 barb clusters per loop. Adjacent coil loops shall be alternately clipped together at 3 points about the circumference to produce the concertina effect upon deployment. Spacing between attachment points when deployed shall be 16" ± 2 ".
- 2.03. Barbed tape shall be fabricated from AISI 430 series stainless steel conforming to ASTM A-176. Stainless steel shall be 1" wide before fabrication by 0.025" thick and shall be hardened to Rockwell (30N) 35-40. The stainless steel strip shall have clusters of four (4) barbs, each a minimum of 1.2" long, punched at 4" centers.
- 2.04. Fabricated (punched) barbed tape shall be reinforced by permanently cold clenching it around a reinforcing wire. Reinforcing wire shall be 0.098" diameter, galvanized steel wire conforming to ASTM A-764, Finish 2, Class II, Type B with a minimum tensile strength of 220,000 psi. The stainless steel barbed tape shall be permanently roll-formed about the core wire with a minimum wrap of 230 degrees. The finished reinforced barbed tape shall be a minimum of 0.325" wide in the throat area and shall exhibit two cut-resistant flanges. These flanges shall taper off in the immediate vicinity of the barb clusters to allow maximum barb penetration.
- 2.05. Reinforced barbed tape shall be converted to concertina by clipping alternate adjacent loops at 3 places about the circumference, continuous along the entire length of the roll. Stainless steel clips shall be 0.375" by 0.065" and mechanically closed to withstand a minimum pull load of 200 pounds.
- 2.06. The two coils will be attached at each end by one 11 gauge aluminum hog ring. (Refer to ASTM 1911 for double concertina coil installation).

3. EXECUTION

- 3.01. Concertina barbed tape shall be securely attached to the chain link fence using 12-1/2 gauge galvanized or stainless steel hog rings or 16 or 18 gauge stainless steel ties. Attachments shall be approximately 16" on center along both the top of the chain link fabric and the top single strand of barbed wire.
- 3.02. Each coil of barbed tape shall be extended a maximum of 20 ft ± 1 ft.
- 3.03. Adjacent coils shall be permanently spliced together by overlapping one cluster each adjacent coil and splicing with two new tie wires or hog rings placed around the shanks of the two coils between the barb clusters.