


This is the closest equivalent to the requested unit. I have also attached our current brochure and some model specific specifications.

This quote is for the trailer only as we do not sell scissor lifts.

Below I have listed the requested specs and listed the No Ramp Specs in red.



- Capacity – 7000 lb. - **10000lb**
- Deck Width – 6 feet – **80”**
- Deck Length – 10 feet – **14’**
- Trailer Weight – 2,500 lb. – **3600lb**
- Lift Mechanism – Hydraulic - Yes
- Tandem axle - Yes
- 15-inch wheels - **16” Wheels**
- Electric brakes -Yes

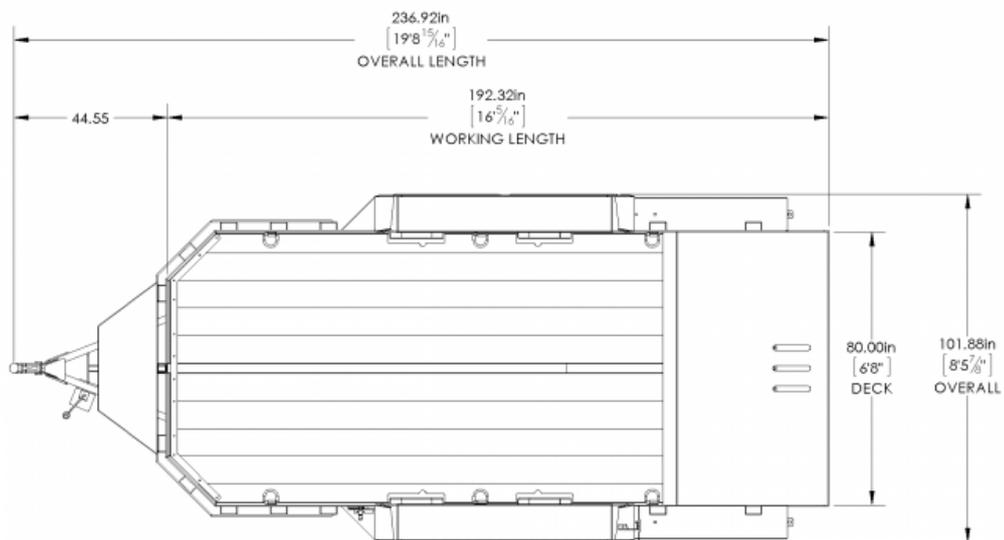

## SPECS

---

<b>Maximum Payload</b>	10,000 lbs.
<b>Axle Rating</b>	2 x 7,000 lbs.
<b>Trailer Weight</b>	3,600
<b>Overall Width</b>	102"
<b>Overall Length</b>	19'6"
<b>Loading Surface Area</b>	80" x 14'
<b>Deck Surface</b>	Treated Pine
<b>Lifting Device</b>	Hydraulic w/Elec. Assist
<b>Suspension</b>	Twin Axle Torsion
<b>Electric Brakes</b>	Standard
<b>Wheel Size</b>	16"
<b>Hitch Size</b>	2 - 5/16"
<b>Systems &amp; Storage Box</b>	Standard
<b>Lighting</b>	LED
<b>Welded D-Rings</b>	6
<b>Banjo Hole Cut Outs</b>	(4) 2/Side-Frt & Rear
<b>Battery</b>	Group 31
<b>Stake Bed Pockets</b>	Standard
<b>Safety Lock</b>	Standard
<b>Warranty</b>	1 Year

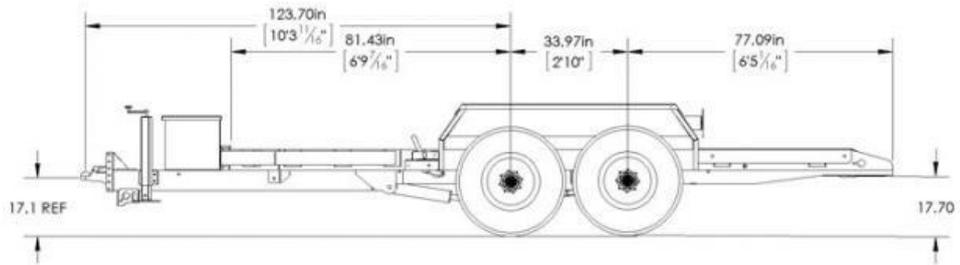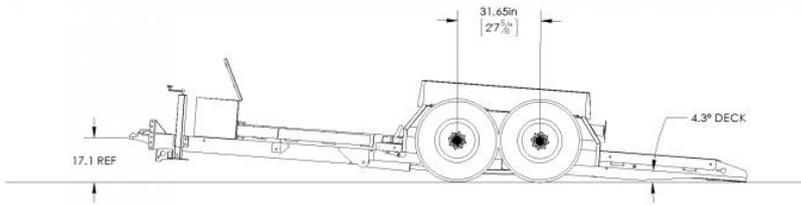



# www.NoRamp.com

PATENTED TILT TRAILERS

**ELIMINATE INJURIES! ■ SAVE TIME & MONEY! ■ AVOID EQUIPMENT DAMAGE!**



## STANDARD FEATURES

2024 MODELS	RS-9	U-12	U-12W	U-14	U-19	CH-20	U-23	U-23GN	U-24	U-24GN
Maximum Payload	1,950 lbs.	4,500 lbs.	4,250 lbs.	10,000 lbs.	10,000 lbs.	8,000 lbs.	9,500 lbs.	9,500 lbs.	15,000 lbs.	15,000 lbs.
Axle Rating	3,500 lbs.	1 x 7,000 lbs.	1 x 7,000 lbs.	2 x 7,000 lbs.	2 x 7,000 lbs.	2 x 6,000 lbs.	2 x 7,000 lbs.	2 x 7,000 lbs.	3 x 7,000 lbs.	3 x 7,000 lbs.
Trailer Weight	1,050 lbs	2,500 lbs	2,750 lbs	3,600 lbs	4,000 lbs	3,800 lbs	4,500 lbs	4,500 lbs	5,400 lbs	6,000 lbs
Overall Width	94"	82"	102"	102"	102"	102"	102"	102"	102"	102"
Overall Length	14'	15' 7"	15' 7"	19' 6"	23' 8"	24' 3"	27' 4"	33' 9/16"	28' 4"	34' 8"
Loading Surface Area	72" x 9'	60" x 10'10"	80" x 10'	80" x 14'	80" x 18'	80" x 19'	80" x 22'	80" x 22'	80" x 23'	80" x 23'
Deck Surface	Treated Pine	Hardwood	Hardwood	Hardwood						
Lifting Device	Hydraulic w/ Elec. Assist									
Suspension	Single Axle Torsion	Single Axle Torsion	Single Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Tri-Axle Torsion	Tri-Axle Torsion
Electric Brakes	Optional	Standard								
Wheel Size	14"	16"	16"	16"	16"	15"	16"	16"	16"	16"
Hitch Size	2"	2 - 5/16"	2 - 5/16"	2 - 5/16"	2 - 5/16"	2 - 5/16"	2 - 5/16"	Gooseneck	Pintle	Gooseneck
Systems & Storage Box	Standard									
Lighting	LED									
Welded D-Rings	N/A	4	4	6	6	N/A	6	6	6	6
Banjo Hole Cut Outs	A Multitude of	(4) 2/Side-Frt & Rear	Standard	(4) 2/Side-Frt & Rear						
Battery	Group 31									
Stake Bed Pockets	Standard									
Safety Lock	N/A	Standard								
Warranty	1 Year									

## FEATURES & BENEFITS

### NO RAMP ADVANTAGES

- **Eliminate Injuries** caused by heavy ramps such as pulled back muscles, smashed feet, and severed fingers that lead to worker comp claims or lawsuits.
- **Save Time & Money** as loading/unloading can be done with-or-without tow vehicle being attached.
- **Avoid Equipment** damage as low approach angle protects equipment from damage caused by falling off ramps during loading and unloading.

### LOW APPROACH TILT TRAILER ANGLE

- Ability to load any low clearance equipment quickly and safely due to low approach angle.
- Applications: Skid Steers, Scissor Lifts, Fork Lifts, Construction, Farming, Industrial Cleaning Equipment, plus so much more...

### LOCKING MECHANISM

- For assured safety of load, in case of accidental hydraulic line damage.

### GOOSENECK

- Our Twin Axle U-23 and Tri-Axle U-24 are available in Gooseneck configurations.

### LED RUBBER MOUNTED LIGHTING

- Better visibility for safety, and low voltage draw for battery life.

### AUXILIARY RECEIVER

- Used for winch mount and other needs.

### EASY ACCESS GREASE ZERKS

- Deck side grease zerks for axle pins, and fender hinges.

### PROTECTED WIRE HARNESS

- Harness runs through 3" steel center channel reducing maintenance costs and lighting failures.

### BUILT-IN THEFT PREVENTION

- Lower trailer, engage safety lock, lock systems box, and prevent theft.

### ENCLOSURES

- All U-Series Trailers are available with aluminum enclosures.

### TORSION AXLE

- Superior ride and long life

### ADJUSTABLE COUPLER

- Allows for any truck in the fleet to do the towing.

### NO JACK NEEDED FOR TIRE CHANGES

- Reduces time with added safety. Break lug nuts loose, apply blocks under each rear corner of trailer, and lower unit to raise tires off the ground.

### STAKE BED POCKETS WITH RUB RAIL

- Provides additional tie down locations, framing-or-racking opportunity, and added main frame strength.

### 15' EXTENSION CORD CONTROL MODULE

- Allows for activation of trailer at the systems box, or up to 15' away.

### AMP METER W/BATTERY LIFE INDICATOR

- To confirm charging from tow vehicle, and show battery charge status.

### SYSTEMS BOX MECHANICAL COVER

- Protects Battery, Pump/Motor from carelessly thrown in tie down straps and tools.

## AVAILABLE OPTIONS

- Custom Colors
- Wireless Remote Key Fob
- Spare Tire
- Spare Tire Rack
- Aluminum Custom Wheels
- Mobile D-Rings
- Pintel Hitch
- Winch Plate
- Winch
- Solar Trickle Charger
- 10amp On-Board Battery Charger
- Hardwood Decking
- Diamond Plate Steel Decking
- Electric/Hydraulic Jack Stand
- Drum Surge Brakes
- 8', 12', 16', and 20' Secure Mobile Storage Containers

Visit [NoRamp.com](https://NoRamp.com) to See NoRamp in Action ■ Phone: (574) 206-1331