



Quote

11/15/2023

Project:

52781 Jefferson Parish Government

From:

Douglas Equipment
Jade Clyburn
301 North St.
Bluefield , WV 24701-4048
304-327-0149

Job Reference Number: 126652

Item	Qty	Description	Sell	Sell Total
1	1 ea	RANGE, 36", 6 OPEN BURNERS Southbend Model No. S36D S-Series Restaurant Range, gas, 36", (6) 28,000 BTU open burners, (1) standard oven, snap action thermostat, removable cast iron grate tops & crumb drawer, hinged lower valve panel, includes (1) rack, stainless steel front, sides, shelf, 4" front rail & 6" adjustable legs, 203,000 BTU, CSA, NSF	\$3,438.34	\$3,438.34
	1 ea	Domestic Shipping, inside of North America		
	1 ea	Standard one year limited warranty (range)		
	1 ea	Natural Gas		
	1 ea	Extra chrome plated oven rack		
	1 ea	3/4" quick disconnect with 4' hose		
		NOTE: does not include installation		
		Lead time: 4 weeks		
			ITEM TOTAL:	\$3,438.34
			Total	\$3,438.34

-BID ALL OR NOTHING, DROP SHIP ONLY.
-NO INSTALLATION REQUESTED; THEREFORE NOT QUOTED.
-PLEASE ADD 3% FOR CREDIT CARD PURCHASES
-DOES NOT INCLUDE STATE SALES TAX WHERE APPLICABLE
-SHIPPING INCLUDED BASED OFF OF THE QUANTITY AND LOCATION REQUESTED.
IF ORDER REFLECTS A DIFFERENT QUANTITY OR LOCATION,
PRICE IS SUBJECT TO CHANGE AT CUSTOMERS EXPENSE.

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$3,438.34

Job: _____ Item#: _____



S-SERIES RESTAURANT RANGE

36" SERIES



S36D
(shown with optional casters)

- ☐ S36D - 6 Open Burners, Standard Oven
- ☐ S36A - 6 Open Burners, Convection Oven
- ☐ S36C - 6 Open Burners, Cabinet Base

Standard Features

- 36-1/2" wide open top with six (6) 28,000 BTU NAT (24,000 BTU LP) PATENTED, one-piece cast iron, non-clog burners with Lifetime Warranty.
- Stainless steel front, sides and removable shelf.
- 4" Stainless steel front rail with closed, welded end caps
- Six (6) removable, cast iron grate tops (rear holds up to 14" stock pot)
- Removable, one-piece crumb drawer under burners
- Metal knobs w/ red stripe
- Hinged, lower valve panel
- Quadrant spring doors with ergonomic chrome handle
- 6" stainless steel, adjustable legs
- Factory installed pressure regulator

Standard Oven Features (D)

- 35,000 BTU space saver oven with snap action thermostat adjustable for 175°F to 550°F
- U-shaped heavy duty oven burner
- Equipped with flame failure safety device
- Large 26" wide X 26-1/2" deep oven with all oven cavity parts enameled
- Four sides and top of oven insulated with heavy, self-supporting block type rock wool with oven baffle assembly
- 2-position rack guides with one removable rack

Convection Oven Features (A)

- 35,000 BTU space saver oven with snap action thermostat adjustable for 175°F to 550°F
- U-shaped heavy duty oven burner
- Equipped with flame failure safety device
- Large 26" wide X 26-1/2" deep oven with all oven cavity parts enameled
- Four sides and top of oven insulated with heavy, self-supporting block type rock wool with oven baffle assembly
- 1/2 hp, 1710 rpm, 60 cycle, 115V AC high efficiency, permanent split phase motor.
- On/Off switch to allow CO base to operate as a standard oven.
- 5-position rack guides with two (2) removable racks.

Cabinet Base Features (C)

- Aluminized cabinet base. Optional no-charge doors that open from the center available.

OPTIONS & ACCESSORIES AT ADDITIONAL COST

- | | | |
|---|---|--|
| <input type="checkbox"/> Casters - all swivel - front with locks | <input type="checkbox"/> Restraining device | <input type="checkbox"/> Cabinet base doors (No charge) |
| <input type="checkbox"/> 10" flue riser | <input type="checkbox"/> Extra oven racks | <input type="checkbox"/> Various salamander & cheesemelter mounts available (Please contact factory) |
| <input type="checkbox"/> 3/4" quick disconnect with flexible hose - complies with ANSI Z 21.69 (Specify 3ft, 4ft or 5ft). | <input type="checkbox"/> Auxiliary griddle plates | |

BIDDING SPECIFICATION

The unit shall be a 36-1/2" wide, S-Series Restaurant Range with six (6) 28,000 BTU NAT (24,000 BTU LP) open top burners with six (6) removable cast iron grate tops.

The exterior of the unit shall be constructed of stainless steel and have a 4" stainless steel front rail with closed, welded end caps.

The unit shall have 6" stainless steel, adjustable legs.

The unit shall come with a 22.5" high stainless steel flue riser with single shelf.

The unit shall come with a factory installed regulator.

S36D - The unit shall have a 35,000 BTU standard oven with snap action thermostat, adjustable from 175°F to 550°F.

The interior shall be enameled and measure 26" wide X 26.5" deep X 14" high, and includes 2-position rack guides with one removable rack.

S36A - The unit shall have a 35,000 BTU convection oven with snap action thermostat, adjustable from 175°F to 550°F.

The unit shall include a 1/2 hp split phase motor with on/off switch to allow CO base to operate as a standard oven.

The interior shall be enameled and measure 26" wide X 24" deep X 14" high, and includes 5-position rack guides with two removable racks.

S36C - The unit shall have an aluminized cabinet base without doors. Optional, no-charge doors that open from the center available.




Approval Notes: _____

Models: ☐ S36D☐ S36A☐ S36C

S36

Dimensions shown in inches and (millimeters)

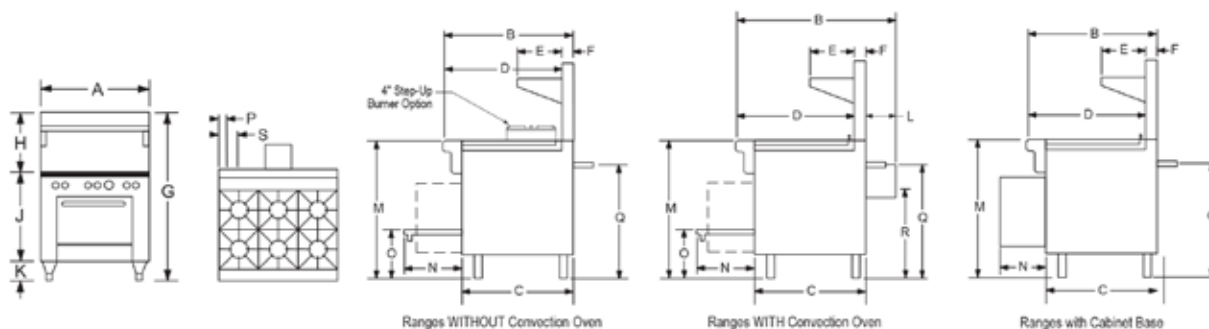

DIMENSIONS

MODEL	EXTERIOR											COOK TOP	DOOR OPENING	OVEN BOTTOM	3/4" GAS CONNECTION		ELECTRIC	
	WIDTH A	DEPTH B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S
S36D	36.50" (927)	34.00" (864)	29.75" (756)	31.00" (787)	10.00" (254)	2.75" (70)	59.50" (1511)	22.50" (572)	31.00" (787)	6.00" (152)	-	37.00" (940)	15.50" (394)	13.00" (330)	2.50" (64)	30.25" (768)	-	-
S36A	36.50" (927)	41.75" (1060)	29.75" (756)	31.00" (787)	10.00" (254)	2.75" (70)	59.50" (1511)	22.50" (572)	31.00" (787)	6.00" (152)	8.25" (210)	37.00" (940)	15.50" (394)	13.00" (330)	2.50" (64)	30.25" (768)	24.00" (610)	6.00" (152)
S36C	36.50" (927)	34.00" (864)	29.75" (756)	31.00" (787)	10.00" (254)	2.75" (70)	59.50" (1511)	22.50" (572)	31.00" (787)	6.00" (152)	-	37.00" (940)	16.50" (394)	-	2.50" (64)	30.25" (768)	-	-

MODEL	OVEN INTERIOR			CRATE SIZE			CUBIC VOLUME	CRATED WEIGHT
	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
S36D	26.00" (660)	26.50" (673)	14.00" (356)	44.00" (1118)	45.50" (1158)	48.00" (1219)	55.6 cu. ft 1.58 cu.m.	535 lbs. 242.7 kg.
S36A	26.00" (660)	24.00" (610)	14.00" (356)	44.00" (1118)	45.50" (1158)	48.00" (1219)	55.6 cu. ft 1.58 cu.m.	535 lbs. 242.7 kg.
S36C	-	-	-	44.00" (1118)	45.50" (1158)	48.00" (1219)	55.6 cu. ft 1.58 cu.m.	535 lbs. 242.7 kg.

Dimensions shown in inches and (millimeters)

UTILITY INFORMATION

GAS TYPE	BURNERS (BTU/EACH)		
	OPEN TOP BURNER	STANDARD OVEN	CONVECTION OVEN
NATURAL	28K	35K	35K
LP	24K	35K	35K

- Each unit has a 3/4", male, rear gas connection.
- Minimum inlet pressure - Natural Gas is 7" W.C.
- Propane Gas is 11" W.C.
- Each convection oven is standard 115/60/1 furnished with 6' cord with 3-prong plug. Total max amps is 5.9.
- Optional - 208/60/1, 50/60/1 phase. Supply must be wired to junction box with terminal block located at rear. Total max amps is 2.7.

MISCELLANEOUS

- For installation on combustible floors (with 6" high legs or casters) and adjacent to combustible walls, allow 10" clearance.
- Clearance to noncombustible construction is 0" for all tops and bases.
- If using Flex-Hose, the I.D. should not be smaller than the I.D. of the manifold of the unit to which it is being connected.
- If casters are used, a restraining device should be used to eliminate undue strain on the flex hose.
- Install under vented hood.
- If the unit is connected directly to the outside flue, an A.G.A approved down draft diverter must be installed at the flue outlet of the oven.

NOTICE:

Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

DISCLAIMER

- NON-Quarry Tile Floor Policy** – "If installing on any NON-Quarry Tile floor (flooring other than quarry tile, cement or natural stone), contact the factory for installation options as damage due to improper installation is not covered under warranty.
- Oversized Cookware Use Policy** – "Oversized cookware is considered anything 12" in diameter or larger. Larger vessels may be used to straddle over open top grates (although efficiency may be lost when doing so). It is highly recommended when using oversized cookware that its use be limited to the rear portion of the range. IF oversized cookware is used on the front portion and hangs over onto the front rail, excessive heat may be driven and trapped in the front rail and can cause premature damage to the components housed there. This is easily avoided by never allowing cookware to overlap the front rail of the range. Electrical and other components housed in this area should see years of performance under normal intended use."

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**

